




KUVE30-W

球单轨引导系统

滑块 KWVE..-W, 用于直线循环滚珠轴承和导轨组件的宽滑块

技术信息




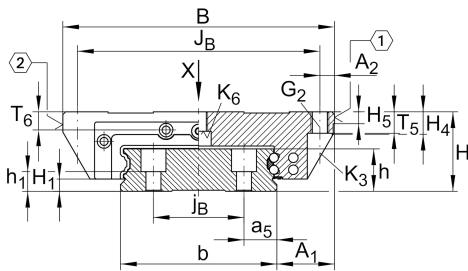


Main dimensions

l_{max}	[5,860] mm	Max length single piece guideway
H	[42] mm	height system
B	[142] mm	width carriage
L	[97.5] mm	overall length carriage

安装尺寸

C	[27,500] N	dynamic load rating
C_0	[55,000] N	static load rating
M_{0x}	[2,660] Nm	static moment rating about X axis
M_{0y}	[700] Nm	static moment rating about Y axis
M_{0z}	[700] Nm	static moment rating about Z axis

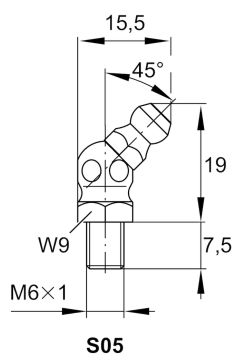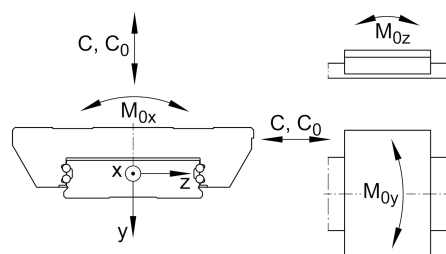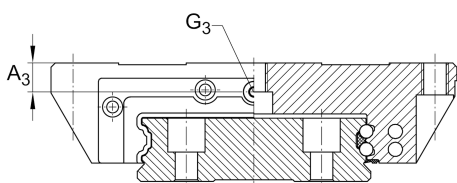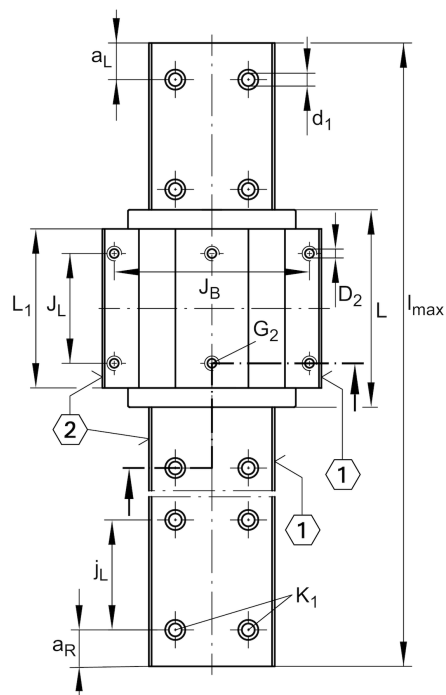

安装尺寸

A_1	[31] mm	
J_B	[124] mm	
j_B	[50] mm	
b	[80] mm	width rail
a_5	[15] mm	
A_2	[9] mm	
L_1	[72] mm	
J_L	[52] mm	
j_L	[80] mm	
$a_{L\min}$	[20] mm	
$a_{L\max}$	[71] mm	
$a_{R\min}$	[20] mm	
$a_{R\max}$	[71] mm	
H_1	[6] mm	
H_4	[13.8] mm	
H_5	[6] mm	
T_5	[12] mm	
T_6	[12] mm	
h	[23.5] mm	
h_1	[11] mm	
G_2	[M10]	fixing screws
G_{2MA}	[41] Nm	maximum tightening torque
K_1	[M8]	fixing screws
K_{1MA}	[41] Nm	maximum tightening torque
K_3	[M8]	fixing screws
K_{3MA}	[41] Nm	maximum tightening torque
K_6	[M8]	fixing screws
K_{6MA}	[12] Nm	maximum tightening torque
d_1	[9] mm	
D_2	[8.6] mm	
A_3	[11.25] mm	
G_3	[M6] mm	
t_{G_3}	[6] mm	

Related products

[KWVE30-W]	Carriage
[TKVD30-W]	suitable Guide Rail